



# P25&PD25 Series

## General Purpose Pressure Sensors

XRI's P25 series pressure sensor is a general purpose, multi-functional, high accuracy pressure sensor. Utilizing advanced micro-machined silicon MEMS technology, unique oil-filled sensing capsule, robust EMI anti-interference design, stainless steel internal and external parts. All make P25 a pressure sensor with high precision, high reliability, and suitable for a variety of measurement applications. The series is configured with a variety of pressure connections and can provide a number of different electrical output signals and methods. The sensors offer a high degree of overload tolerance and measurement safety through their solid, all stainless steel construction. The highly modular design allows customers to quickly meet special customization requirements.

The PD25 differential pressure version is designed with a wet/wet differential pressure configuration as its base model. This innovative design accommodates dry/dry, dry/wet, and wet/wet differential pressure applications while maintaining consistent pricing and high cost-effective, eliminating the complexities of selecting between dry/dry, dry/wet, and wet/wet differential pressure types. It reflects XRI's corporate philosophy: "Customer First, Service First, Quality First."

### About Us

- XRI Innovation, Inc. (XRI) is a vertically integrated company aimed at reaching the pinnacle of sensing-with innovative and modern designs and manufacturing technologies.
- XRI is committed to offering high-end products with technology innovation, quality control and production efficiency.
- Portfolio includes pressure, temperature, flow, position, displacement, rotational speed, gas and others. The products are positioned for high-end applications, especially in aerospace, precision manufacturing, oil and gas and transportation vehicles.
- XRI adheres to the principle that company employees as a team are the most valuable asset, and focuses on building a company that values reliability, devotion and innovation.
- XRI firmly believes that 'Satisfying Customers' Wants is the Primary Mission of XRI.

XRI is a "continuous improvement" company. Its product [datasheets](#) evolve as technology advances. Most update versions are on [www.XRIINC.com](http://www.XRIINC.com)

# Specifications

## Physical properties

Item	Description	
Range <sup>1</sup>	Absolute, Sealed gage , Gauge or Differential	
Unit	MPa	PSI
Absolute and Sealed gage Measurement Range	0-1	0-150
	0-2	0-300
	0-5	0-700
	0-10	0-1500
	0-35	0-5000
	0-70	0-10000
	Note: Other non-standard ranges or units can be customized	
Gage and Differential Measurement Range	0-0.01	0-1.5
	0-0.02	0-3
	0-0.05	0-7
	0-0.1	0-15
	0-0.2	0-30
	0-0.5	0-70
	0-1	0-150
	0-2	0-300
	0-5	0-700
		Note: Other non-standard ranges or units can be customized
Accuracy (Combined Non-Linearity, Hysteresis and Repeatability <sup>7</sup> )	A1: 0.2% FS <sup>5</sup> BFSL A2: 0.1% FS <sup>5</sup> BFSL	
	*Other choices available upon request	
Over Pressure <sup>2</sup>	2 x FS <sup>5</sup>	
Burst Pressure <sup>3</sup>	3 x FS <sup>5</sup>	

## Mechanical Properties

Item	Description
Pressure Connection	See configuration guide
Vibration Resistance	20g, Max 10-2500Hz; Shock<20ms
Housing Material	Typically 316L/17-4PH (*Other choices available upon request)
Test Medium	All gases and fluids compatible with 316L/17-4PH
Weight	≤ 140g; Cable and connector weight extra

## Temperature Properties<sup>4</sup>

Item	Description	
Compensated Temperature Range	-40°C~125°C or within this range	
Operating and Storage Temperature Range	-55°C~150°C	
Temperature Change Coefficient or Total Error Band <sup>7</sup>	EA, EB	
	Thermal Zero Shift	< ±1.5% FS <sup>5</sup> /100°C
	Thermal Sensitivity Shift	< ±1.5% FS <sup>5</sup> /100°C
	EC, ED, EE, EF	
	Total Error Band <sup>6</sup>	< 0.5% FS <sup>5</sup> /100°C

## Electrical Properties















Item	Description
Excitation/Output	See configuration guide
Actual Frequency Response	For static measurements, actual frequency response is approx 5Hz @3DB
	Note: Transducer frequency response is also related to how the transducer is installed. See XRI's official website <a href="http://www.XRIINC.com">www.XRIINC.com</a> —Application Notes Section or consult XRI's after-sales service department for details.
Power-up Time	EA, EB < 1ms
	EC, ED, EE, EF < 200ms
Zero and Full Scale Output (Room Temperature)	Within ±5% of nominal value
	*Other choices can be customized
Insulation Resistance	≥ 100MΩ @50VDC
Dielectric Strength	Leakage current ≤ 5mA @50VAC RMS
Max operating current	EC, ED, EE, EF < 25mA
Input Impedance	EA, EB > 5000 Ω
	EA, EB 5000 Ω (typical)
Output Impedance	EC, ED, EE, EF < 150 Ω
Long-term Stability	Typically within ±0.1%FS <sup>5</sup>
Electrical Connection	See configuration guide, customizable

- Offers composite ranges such as from 5~100kPa Absolute Pressure.
- Pressure exposure not exceeding proof pressure does not affect transducer performance.
- Burst Pressure is a safety upper limit. Over this value transducer may be permanently damaged.
- Temperature effects are related to sensor accuracy variations within the compensation temperature range.
- FS= Full scale.
- Error based on deviations away from the best endpoint fit straight line calibration.
- Reference to ISA 37.1-1975(R1982).


# Electrical Connection Definition

Connection Type	Pin or wire color	Purpose					
		EA	EB	EC	ED	EE	EF
E1	A/1	Vin+	Vin+	Vin+	Vin+	Vin+	Vin+
	B/2	Vout+	Vout+		Vout+	Vout+	Vout+
	C/3	Vout-	Vout-			Vout-	Vout-
	D/4	Vin-	Vin-	Vin-	Vin-	Vin-	Vin-
	E/5						
	F/6						
E2	A/1	Vin+	Vin+	Vin+	Vin+	Vin+	Vin+
	B/2	Vout+	Vout+		Vout+	Vout+	Vout+
	C/3	Vout-	Vout-			Vout-	Vout-
	D/4	Vin-	Vin-	Vin-	Vin-	Vin-	Vin-
	E/5						
	F/6						
E3	A/1	Vin+	Vin+	Vin+	Vin+	Vin+	Vin+
	B/2	Vout+	Vout+		Vout+	Vout+	Vout+
	C/3	Vout-	Vout-			Vout-	Vout-
	D/4	Vin-	Vin-	Vin-	Vin-	Vin-	Vin-
	E/5						
E4	A/1	Vin+	Vin+	Vin+	Vin+	Vin+	Vin+
	B/2	Vout+	Vout+		Vout+	Vout+	Vout+
	C/3	Vout-	Vout-			Vout-	Vout-
	D/4	Vin-	Vin-	Vin-	Vin-	Vin-	Vin-
E5	A/1	Vin+	Vin+	Vin+	Vin+	Vin+	Vin+
	B/2	Vout+	Vout+		Vout+	Vout+	Vout+
	C/3	Vout-	Vout-			Vout-	Vout-
	D/4	Vin-	Vin-	Vin-	Vin-	Vin-	Vin-
E6	A/1	Vin+	Vin+	Vin+	Vin+	Vin+	Vin+
	B/2	Vout+	Vout+		Vout+	Vout+	Vout+
	C/3	Vout-	Vout-			Vout-	Vout-
	D/4	Vin-	Vin-	Vin-	Vin-	Vin-	Vin-
E7	A/1	Vin+	Vin+	Vin+	Vin+	Vin+	Vin+
	B/2	Vout+	Vout+		Vout+	Vout+	Vout+
	C/3	Vout-	Vout-			Vout-	Vout-
	D/4	Vin-	Vin-	Vin-	Vin-	Vin-	Vin-
E8	Red	Vin+	Vin+	Vin+	Vin+	Vin+	Vin+
	Green	Vout+	Vout+		Vout+	Vout+	Vout+
	White	Vout-	Vout-			Vout-	Vout-
	Black	Vin-	Vin-	Vin-	Vin-	Vin-	Vin-
E9	Red			Vin+			
	Black			Vin-			
E12	1	Vin+	Vin+	Vin+	Vin+	Vin+	Vin+
	2	Vout+	Vout+		Vout+	Vout+	Vout+
	3	Vout-	Vout-			Vout-	Vout-
	E	Vin-	Vin-	Vin-	Vin-	Vin-	Vin-

# Transducer outline dimensions

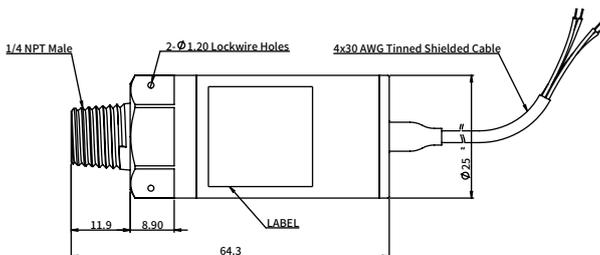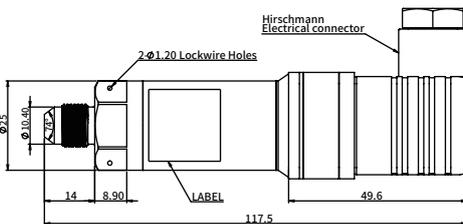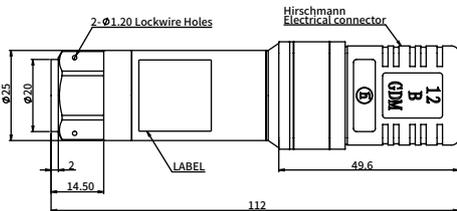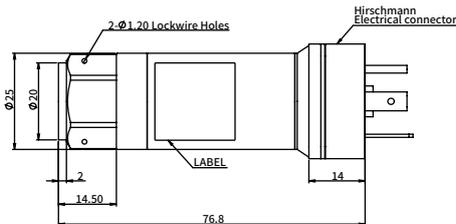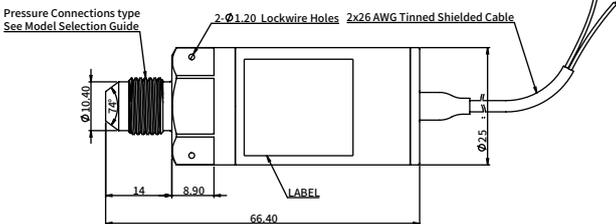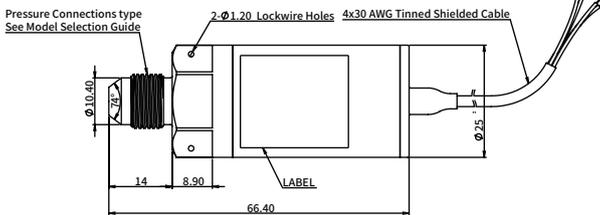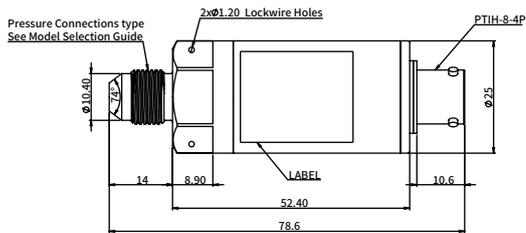


# Pressure connection

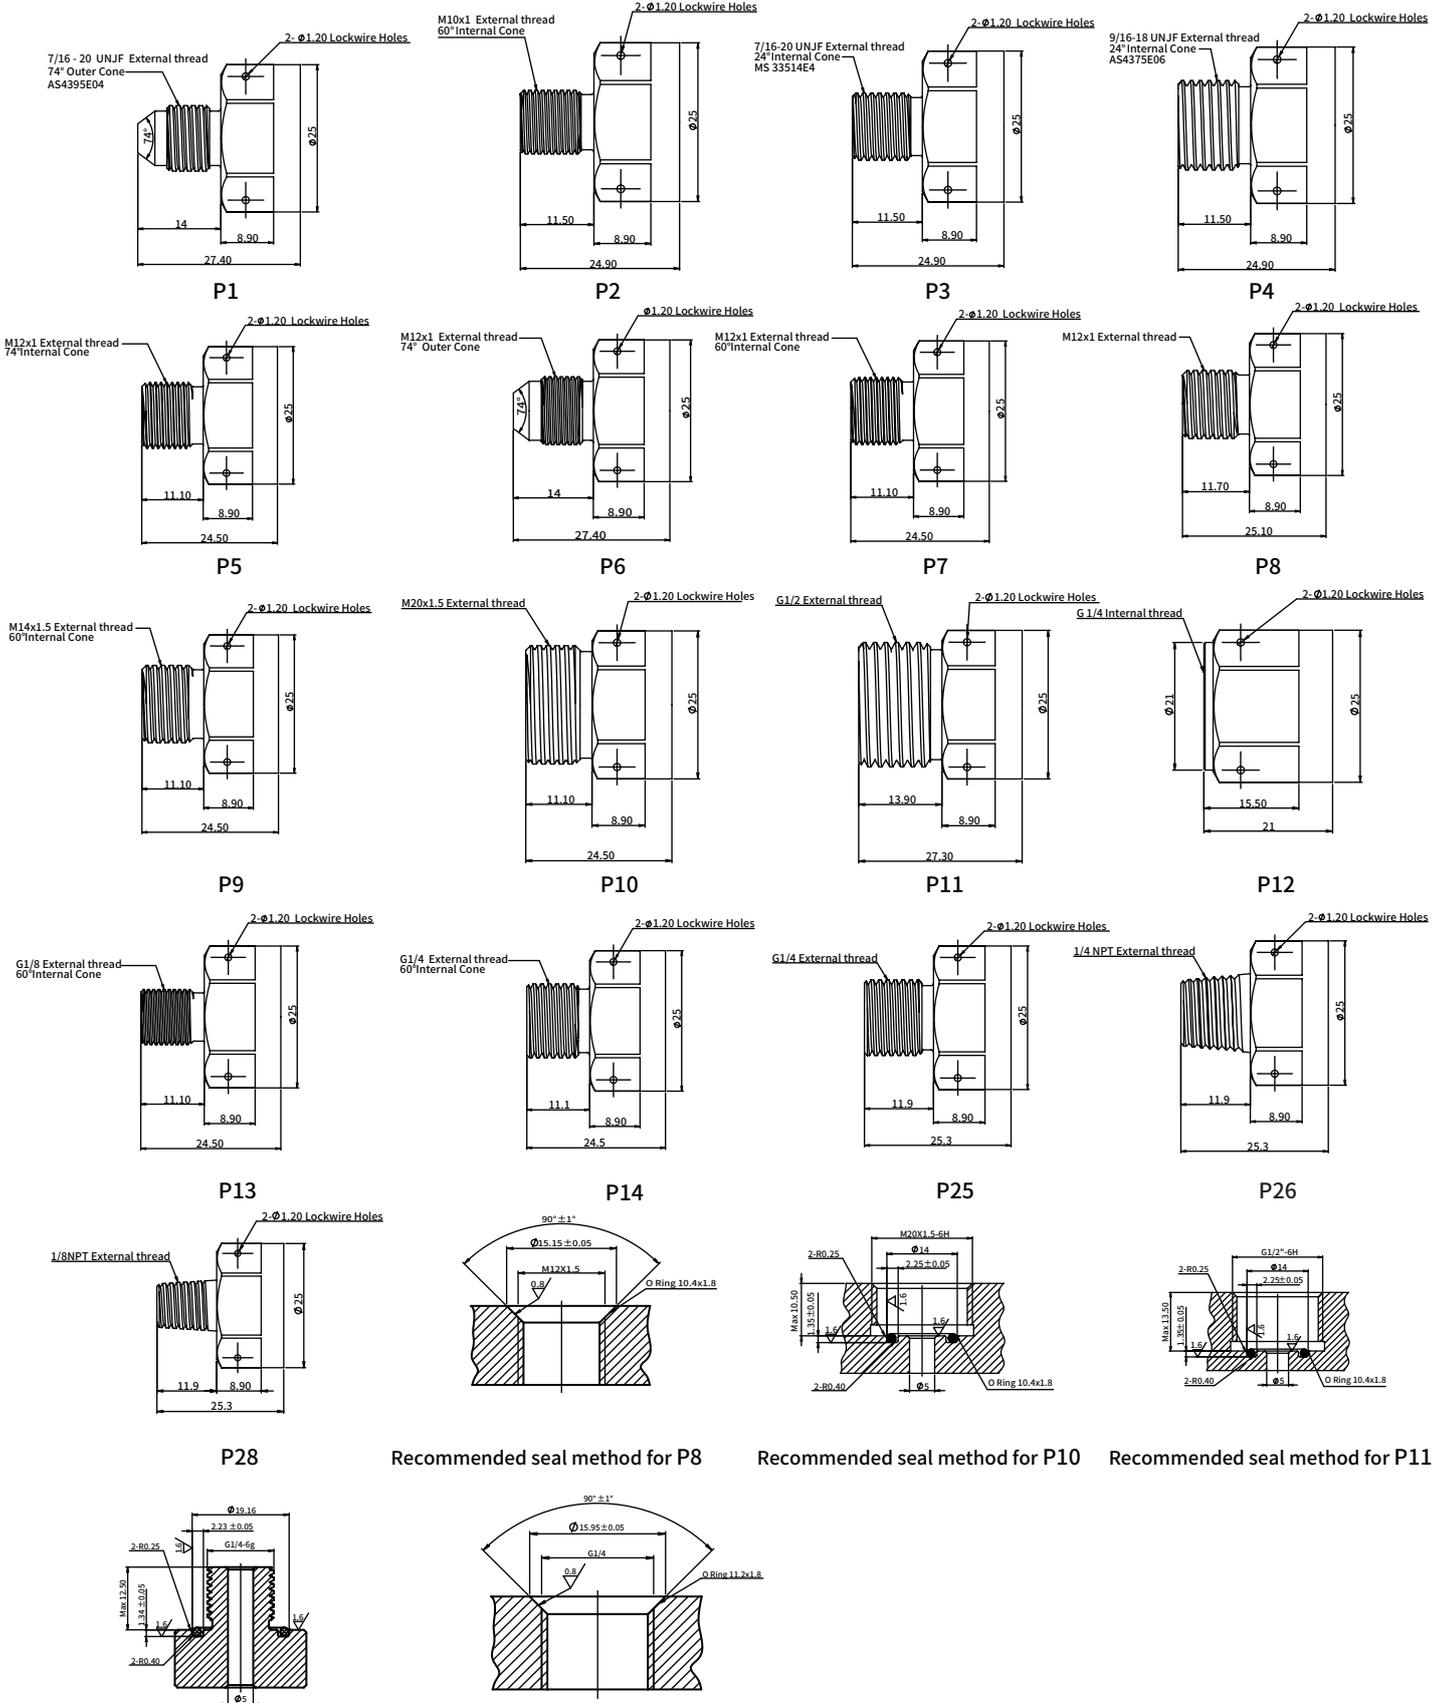


Recommended seal method for P12

Recommended seal method for P25


# Electrical Connector




**E1**  
6 Pin, D38999/25YB98PN




**E2**  
6 Pin, MIL-C-26482 Series II Shell Size 10




**E4**  
4 Pin, MIL-C-26482 Series I Shell Size 8




**E5**  
PTIH-8-4P

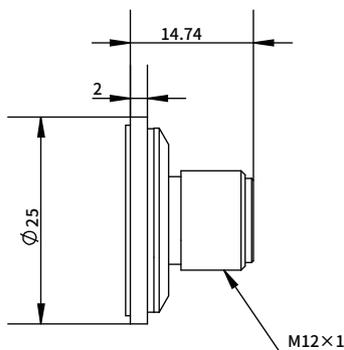


**E6**  
4 Pin M12x1

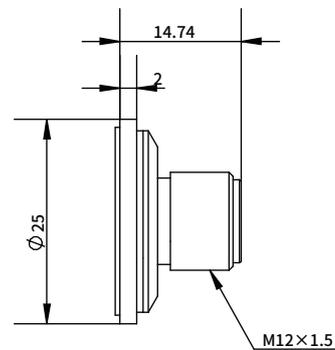


**E7**  
4 Pin M12x1.5

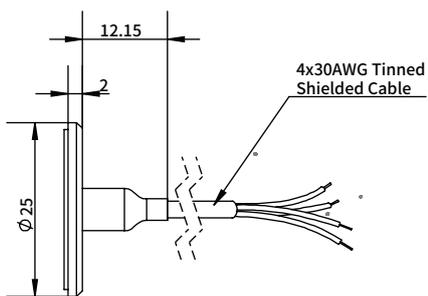

**E8**  
4x30AWG (1m length) Tinned Shielded Cable

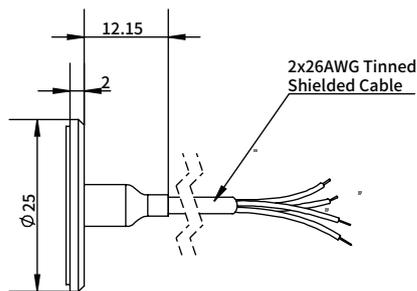

**E9**  
2x26AWG (1m length) Tinned Shielded Cable

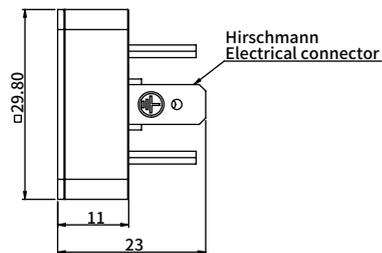

**E12**  
DIN43650

# Configuration guide

## Base Model

P25 Absolute, Sealed gage

PD25 Gage and Differential

### Electrical Properties

EA	0~100mv output, 10VDC supply, output proportional to supply voltage, 4-wire
EB	0~100mv output, 8~16VDC supply, output independent of supply voltage, 4-wire
EC	4~20mA output, 12~28VDC power supply, high precision digital compensation, 2-wire
ED	0.5~4.5V output, 8~32VDC power supply, high precision digital compensation, 3-wire
EE	0~5V output, 8~32VDC power supply, high precision digital compensation, 4-wire, output common mode 2.5V (typical)
EF	0~10V output, 14~32VDC power supply, high precision digital compensation, 4-wire, output common mode 5V (typical)

### Electrical Connector

E1	6 Pin D38999/25YB98PN	E6	4 Pin M12×1
E2	6 Pin MIL-C-26482 Aviation Connector, Series 1, Size 10 Shell	E7	4 Pin M12×1.5
E3	5 Pin MS83723/90Y1005PN	E8	4x30AWG (1m length) Tinned Shielded cable
E4	4 Pin MIL-C-26482 Aviation Connector, Series 1, Size 8 Shell	E9	2x26AWG (1m length) Tinned Shielded cable
E5	PTIH-8-4P	E12	DIN43650 Removable (* Within -40~80°C)

Other choices available upon request

### Pressure Connections

P1	7/16-20 UNJF External Thread (74° External taper, AS4395E04)	P10	M20×1.5 External Thread
P2	M10×1 External Thread (60° Internal taper)	P11	G1/2 External Thread
P3	7/16-20 UNJF External Thread (24° Internal taper, MS33514E4)	P12	G1/4 Internal Thread
P4	9/16-18 UNJF (24° Internal taper, AS4375E06)	P13	G1/8 External Thread (60° Internal taper)
P5	M12×1 External Thread (74° Internal taper)	P14	G1/4 External Thread (60° Internal taper)
P6	M12×1 External Thread (74° External taper)	P25	G1/4 External Thread
P7	M12×1 External Thread (60° Internal taper)	P26	1/4 NPT External Thread
P8	M12×1.5 External Thread	P28	1/8 NPT External Thread
P9	M14×1.5 External Thread (60° Internal taper)		

Other choices available upon request

### Temperature Compensation

TA	25°C~80°C	TE	-10°C~50°C
TB	-20°C~125°C	TF	-20°C~80°C
TC	-40°C~125°C	TG	-40°C~80°C

### Accuracy

A1	0.2%FS BFSL
A2	0.1%FS BFSL

Other choices available upon request

### Calibration report

CA	6 points room temperature pressure calibration data
CB	5 temperature points pressure data

### Range Unit Pressure types

(0-70)	MPa A	Absolute
(-0.1~5)	MPa G	Gage
(-0.1~70)	MPa S	Sealed Gage
(-1.5~5)	MPa D	Differential

### Special requests

S: Refer to the purchase contract

Example: P25 -EA -E3 -P6 -TA -A1 -CA -(0-20)MPaA -S